

BattGO®

E625

6 CHANNELS SMART CHARGER

USER GUIDE

Thank you for purchasing the BattGO E625 Smart Charger.

The BattGo E625 6 Port 1S Battery Charger is a versatile and compact solution that supports both PH2.0 and BT2.0 connectors simultaneously. It ensures faster charging when paired with a PD adapter above 30W. This portable, high-speed charger meets all your charging needs efficiently.



Warnings and Safety Tips

To ensure your safety and a good user experience, please read these instructions and warnings before using this product.

- Never use the charger without supervision, please stop using the charger and refer to the manual for reasons if any functional abnormality.
- Keep the charger away from dust, humidity, rain and high temperature, as well as avoid direct exposure to the sunlight and intense vibration.
- Place the charger on a heat-resisting, non-flammable and insulating surface. Do not use it on the car's seats, carpet or other similar places.
- Read the instruction manual carefully to be familiar with the features of the charger, and set proper charging parameters before operating. Setting the parameters incorrectly will result in damage to the product, personal property and cause serious injury as well.

NEVER USE CHARGER UNSUPERVISED

- Never attempt to charge primary (non-rechargeable) batteries.
- Batteries pose a severe risk of fire if not properly handled.
- Read entire operation manual before using charger.
- This unit may emit heat during use.
- Only operate this device in a cool ventilated area away from flammable objects.
- Failure to observe safety procedures may cause damages to property or injury.



WARNING!



FIRE HAZARD!

Specifications

Input Range: DC 8~30V 5A(Max)

Charging Current: 2.5A(Max)

Max. Charging Power: 10W/port

Store Voltage: 3.7v/3.8v/3.85v

Supported Battery Types: LiHv, LiPo

Dimension: 108×58.5×25.2mm

Output Voltage: 4.25V/4.4V


Discharging Current: 2.5A(Max)/port

Max. Discharging Power: 8W(Total)

User Temperature: 0~40°C

Weight: Approximately 95g

Port / Buttons

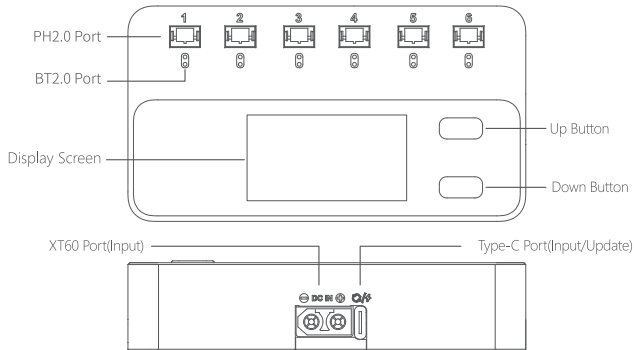

Key Operation

1. Hold down the up key to enter the charging task setting, the voltage display blinks, then press the down key to set the voltage, then hold down the up key again, the current display blinks, and press the down key to set the current. The charging task automatically exits the setting 10 seconds after you enter the setting and do not perform any operation.
2. Short press the up button will start the charging or discharging task. The corresponding selected voltage and current will change color. Short - press again to stop the current task. After a task is enabled, the parameters of the current task are automatically saved.
3. Long press the down button to mute or unmute the device.

Feature

- This portable PD power adapter above 30W delivers fast and efficient charging whether you're at home or on the move.
- With 6 individual ports, it supports charging six batteries simultaneously with a maximum charging current of 2.5A

- The 1S Battery Charger and Discharger (up to 2.5A max per post) supports Type - C and XT60. The Type - C port uses the PD protocol that supports fast charging at 9V, 12V, 15V and 20V.
- PH2.0 and BT2.0 compatibility
- Multiple Power Inputs (XT60 | PD)
- Featuring a colorful 1.9 - inch IPS screen with 320x170 16 - bit full - color pixels, it utilizes IPS technology to ensure vibrant colors even at viewing angles up to 80 degrees in any direction.



www.isdt.co

*All product photos, statements and literature are for reference only. For up-to-date information, please visit our official web www.isdt.co

SHENZHEN ISD TECHNOLOGY CO. LTD

ISDT reserves the right of final explanation and revision for the terms.

BattGO®

E625

6通道智能充电器

用户手册

感谢您购买 BattGO E625 智能充电器。

BattGo E625 6 端口 1S 电池充电器是一款多功能的紧凑型解决方案，可同时支持 PH2.0 和 BT2.0 连接器，与 30W 以上的PD适配器搭配使用时可确保更快的充电速度。这款便携式高速充电器可有效满足您的所有充电需求。

警告与安全提示

为确保您的安全和良好的用户体验，请在使用本产品前阅读本说明和警告。

- 不要在无人值守的情况下使用充电器，如充电器出现任何功能异常，请立即终止使用并对照说明书查阅原因；
- 确保充电器远离灰尘、潮湿、雨和高温，避免阳光直射及强烈震动；
- 请将充电器放置于耐热、不易燃及绝缘的表面。不要放置在车座、地毯等类似的地方使用。请确保易燃、易爆炸物品远离充电器的操作区域；
- 确保您已充分了解所使用电池的充放电特性及规格，并在充电器中设置恰当的充电参数。如参数设定错误，可能对充电器及电池造成损坏，甚至发生火灾、爆炸等灾难性后果。

- 接入电池前请确保电池电压与本产品工作电压范围相符；
- 使用过程中确保本产品远离热源及潮湿环境，并注意通风散热；
- 本产品工作过程中将产生大量热量，切勿让儿童操作，以免烫伤；
- 使用结束后，应尽快断开及移除电池。



警告!



远离火源!

产品规格

输入范围: DC 8~30V 5A(Max)

充电电流: 2.5A(Max)

最大充电功率: 10W/port

存储电压: 3.7v/3.8v/3.85v

支持电池类型: LiHv, LiPo

尺寸: 108×58.5×25.2mm

输出电压: 4.25V/4.4V



放电电流: 2.5A(Max)/port

最大放电功率: 8W(total)

工作温度: 0~40°C

重量: 约95g

📌 接口 / 按键

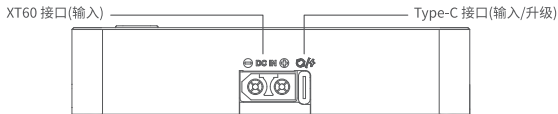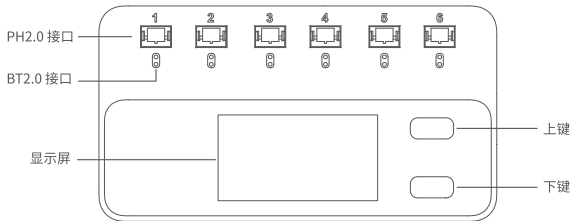

接口 / 按键

1. 长按上键进入充电任务设置, 电压显示闪烁, 此时短按下键即可设置电压, 再次长按上键, 电流显示闪烁, 此时短按下键即可设置电流。进入设置未操作10s后自动退出充电任务设置。
2. 短按上键会开启充电或放电任务, 对应选择的电压电流会变色, 再次短按停止当前任务。任务开启后, 当前任务参数自动保存。
3. 长按下键静音或解除静音。

产品特征

- 这款 30W 以上的便携式 PD 电源适配器无论室内还是室外, 都能提供快速高效的充电。
- 6 个独立端口, 支持同时为六块电池充电, 充电电流最大 2.5A。
- 1S 电池充放电器 (每个端口最大 2.5A), 支持 Type-C、XT60。Type-C 使用 PD 协议, 支持在 9V、12V、15V 和 20V 电压下快速充电。
- 兼容 PH2.0 和 BT2.0
- 多种电源输入 (XT60 | PD)

- 存储充电功能
- 彩色 1.9 英寸 IPS 屏幕显示,采用 320x170 16 位全彩像素和 IPS 技术,即使在任何方向视角达到 80 度时也能确保色彩鲜艳。



www.isdt.co

*本产品所有图片、声明及文字资料仅供参考,实际信息请参考官方网站 www.isdt.co 。

深圳艾斯特创新科技有限公司拥有对本说明书内容的最终解释权和修改权。